

The Clinic/Health Center Solution Relief™ System from Response Shelter

A solution – straight off the shelf. Means real cost savings.



Modular construction allows for a mixing and matching of materials and services that result in more building for the buck.

Real-time savings. You have a need. You have a site. Select a plan. Assemble the components.



Specification

Functional range and tolerance of;

Outside temperature range from $-10\text{ }^{\circ}\text{C}$ to $+45\text{ }^{\circ}\text{C}$
Drought conditions
Monsoon Rain
Seismic/Earthquake rated to Zone 3
Constant wind speed up to 120kph
Roof load 1.0 kN/m^2

Size:


Sizes shipped as standard, are; 25, or 50 m^2
Custom designs can accommodate larger areas.
We have separate male/female examination blocks
- so important in many Middle Eastern & Asian Cultures.

Mobility:

Carried off in sections using manual labor.
Lifted by manual labor and loaded onto transport,
Packed in robust re-useable pallets.

Re-use:

The modules can be disassembled, relocated and reassembled up to ten times without significant deterioration, dependent upon use or misuse during storage, transport and installed use.

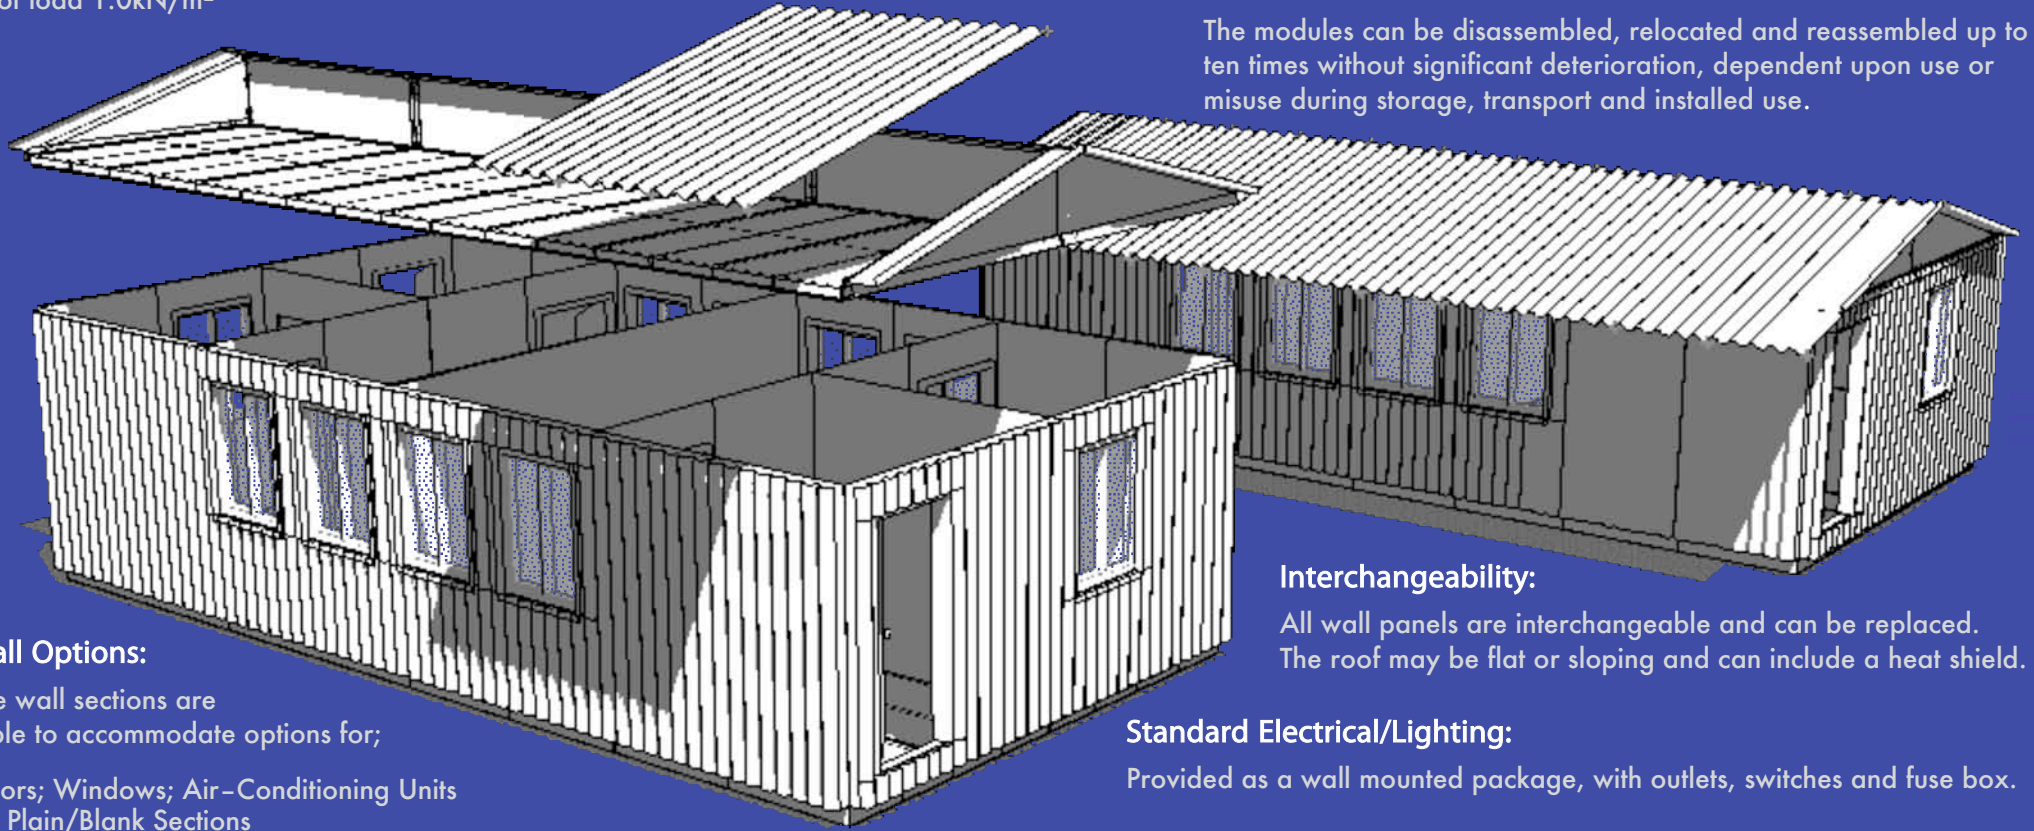

Wall Options:

The wall sections are able to accommodate options for;

Doors; Windows; Air-Conditioning Units
Or Plain/Blank Sections

Interchangeability:

All wall panels are interchangeable and can be replaced.
The roof may be flat or sloping and can include a heat shield.

Standard Electrical/Lighting:

Provided as a wall mounted package, with outlets, switches and fuse box.

Assembly:

The units are easy to erect or assemble on an unprepared firm site
By unskilled labor
Without mechanical aids
Manufacturers pictorial instructions
Optional: Leveling devices allow for a variation of up to 2.5m across the base area of the module.
Optional: Multi-Language Instructional DVD/VCD

Color:

Any color, as per clients specification.
Identification: can be marked or decal-ed, as per client's specification.

Fire Rated:

Class O inside, Class 3 outside.
Components specified to suit American domestic standards

50 m² Clinic