

# The Site Office Solution

## Relief™ System from Response Shelter

**A solution – straight off the shelf. Means real cost savings.**



Modular construction allows for a mixing and matching of materials and services that result in more building for the buck.

Real-time savings. You have a need. You have a site. Select a plan. Assemble the components.



# Specification

**Size:**  
 Sizes shipped as standard, are; 25, 37<sup>1/2</sup>, 50 or 75m<sup>2</sup>  
 Accommodates larger areas and customization.  
 The roof may be flat or sloping and can include a heat shield.

**Mobility:**  
 Carried off in sections using manual labor.  
 Lifted by manual labor and loaded onto transport,  
 Packed in robust re-useable pallets.


**Assembly:**  
 The units are easy to erect or assemble on an unprepared firm site  
 By unskilled labor  
 Without mechanical aids  
 Manufacturers pictorial instructions  
 Optional: Leveling devices allow for a variation of up to 2.5m across the base area of the module.  
 Optional: Multi-Language Instructional DVD/VCD

**Re-use:**  
 The modules can be disassembled,  
 relocated and reassembled up to ten times  
 without significant deterioration, dependent  
 upon use or misuse during storage, transport and installed use.

**Functional range and tolerance of;**  
 Outside temperature range from -10 c° to +45 c°  
 Drought conditions  
 Monsoon Rain  
 Seismic/Earthquake rated to Zone 3  
 Constant wind speed up to 120kph  
 Roof load 1.0kN/m<sup>2</sup>

**Fire Rated:**  
 Class O inside, Class 3 outside.  
 Components specified to meet  
 American standards

**Standard Electrical/Lighting:**  
 Provided as a wall mounted package,  
 with outlets, switches and fuse box.

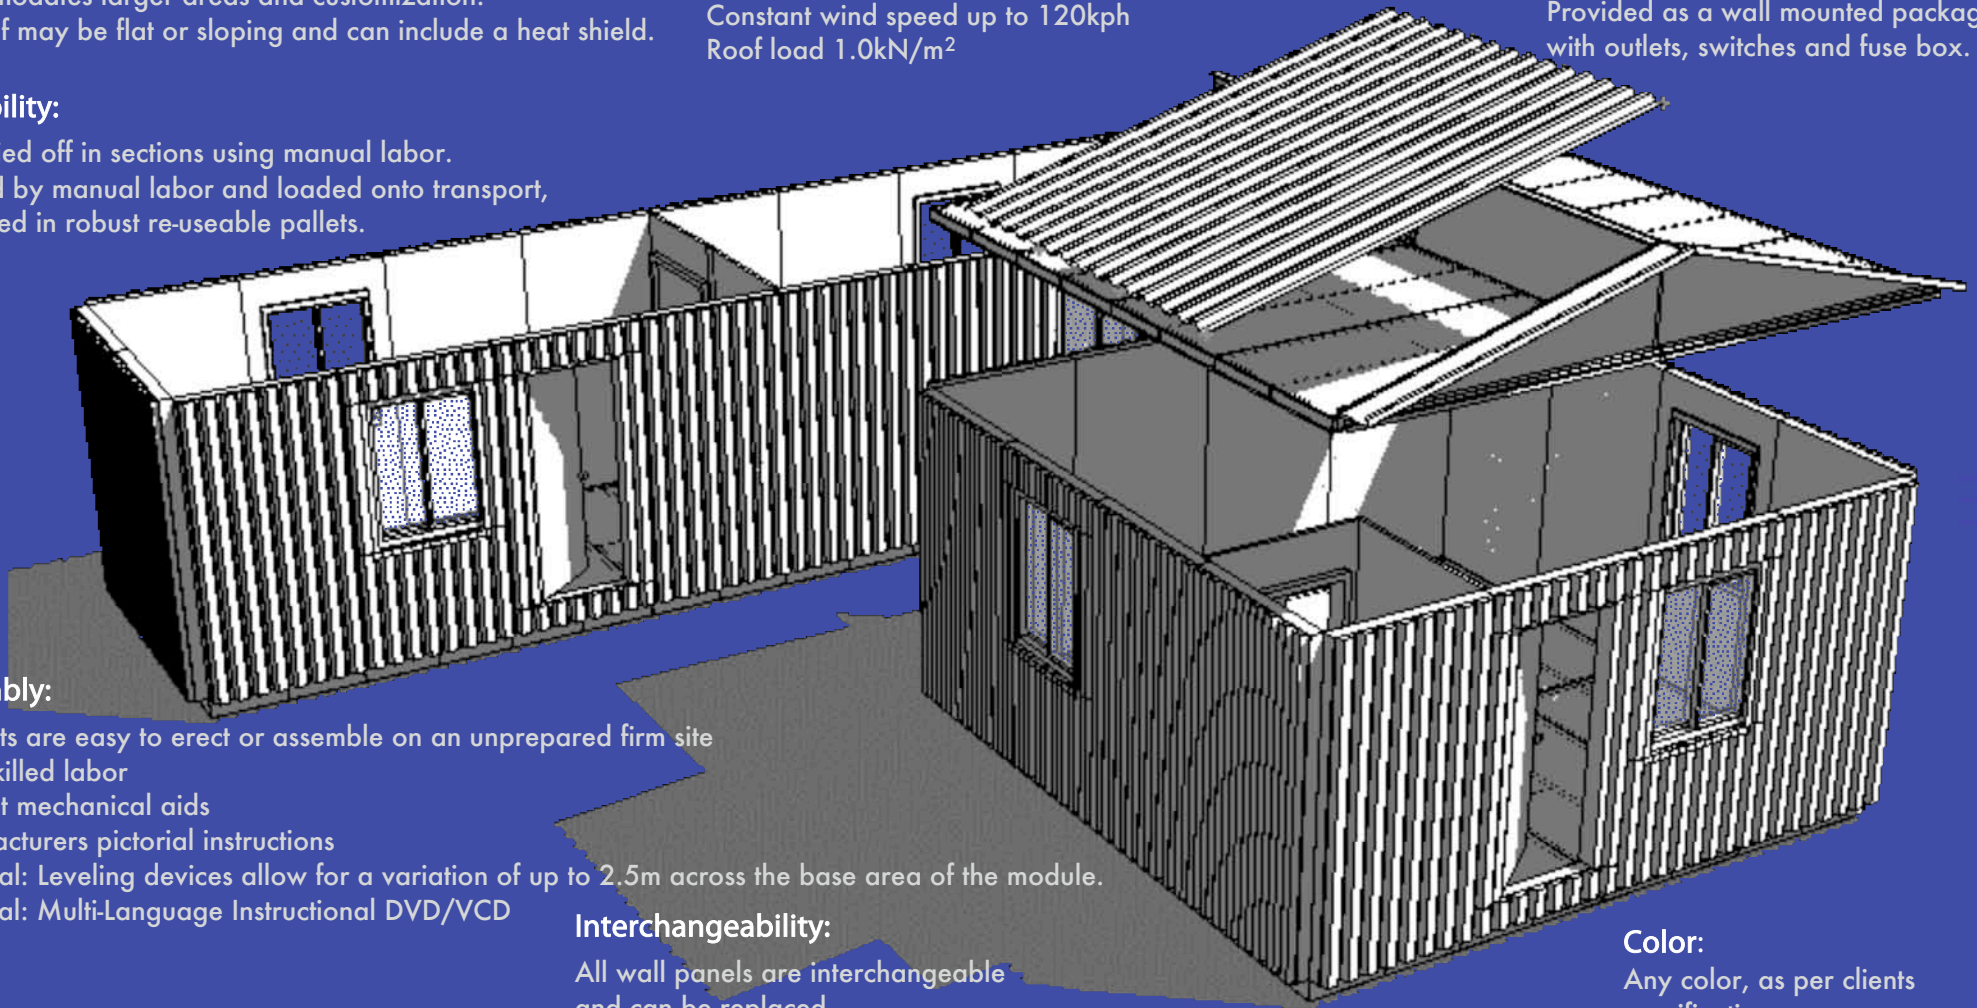

**Interchangeability:**  
 All wall panels are interchangeable  
 and can be replaced.

**Wall Options:**  
 The wall sections are able to accommodate options for;  
 Doors; Windows; Air-Conditioning Units  
 Or Plain/Blank Sections

**Color:**  
 Any color, as per clients  
 specification.  
 Identification: can be  
 marked or decal-ed, as per  
 client's specification.

25 m<sup>2</sup> Site Office